



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>B29C 55/26, 47/88 // B29L 23:00</b>	<b>A1</b>	(11) International Publication Number: <b>WO 97/10096</b> (43) International Publication Date: 20 March 1997 (20.03.97)
---	-----------	--

(21) International Application Number: PCT/AU96/00575


(22) International Filing Date: 13 September 1996 (13.09.96)

(30) Priority Data:  
PN 5475 15 September 1995 (15.09.95) AU(71) Applicants (for all designated States except US): VINIDEX  
TUBEMAKERS PTY. LIMITED [AU/AU]; 15 Merriwa  
Street, Gordon, NSW 2072 (AU). UPONOR B.V. [NL/NL];  
Hoekenrode 6-8, NL-1002 BR Amsterdam (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): CHAPMAN, Peter,  
Glanville [AU/AU]; 45 Ronald Avenue, Greenwich, NSW  
2065 (AU). JARVENKYLA, Jyri [FI/FI]; Tapiontie 4,  
FIN-15780 Hollola (FI).(74) Agents: HALFORD, Graham, William et al.; Halford & Co., 1  
Market Street, Sydney, NSW 2000 (AU).(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR,  
BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE,  
HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS,  
LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL,  
PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA,  
UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ,  
UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ,  
TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR,  
GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF,  
BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).**Published***With international search report.*

(54) Title: BIAXIAL STRETCHING OF PLASTIC TUBES

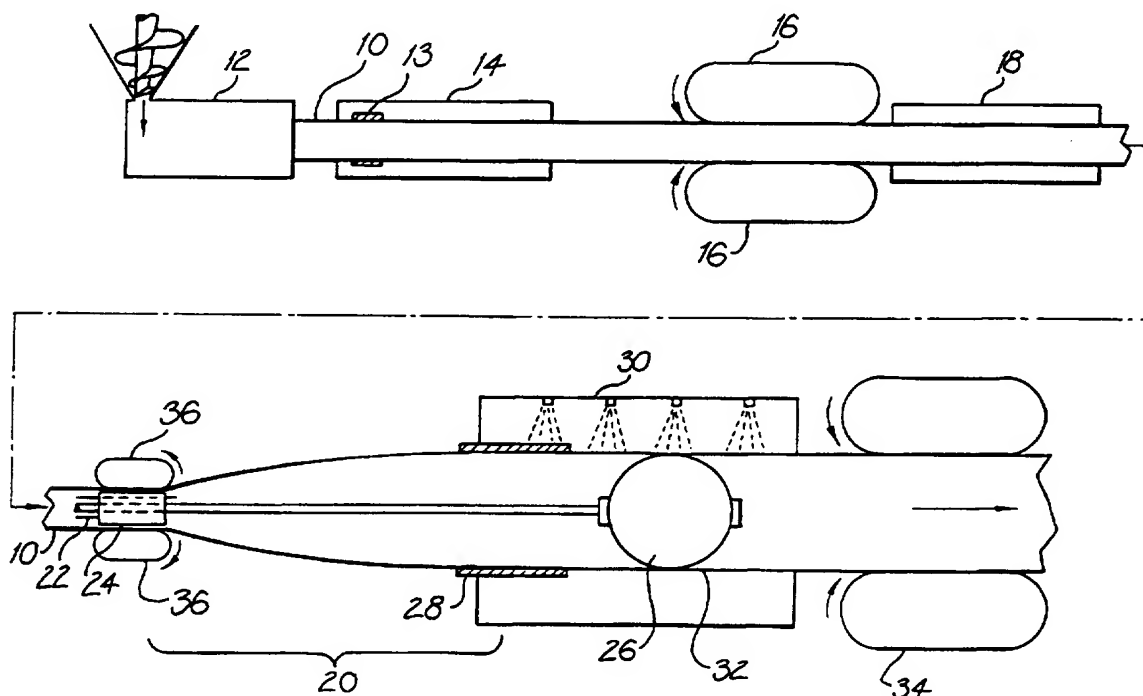

## (57) Abstract

A continuous process and apparatus for producing oriented plastic tube comprising the steps of extrusion (12), temperature conditioning (18), diametrical expansion (zone 20) and cooling (30), characterised in the step of inducing axial draw of the tube between first (16) and second (25, 36) haul-off means located upstream of said expansion step (zone 20).

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgystan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

## BIAXIAL STRETCHING OF PLASTIC TUBES

### BACKGROUND OF THE INVENTION

This invention relates to process and apparatus for the manufacture of oriented plastics tubes, and in particular to the manufacture of tubes which have been stretched (drawn) in both the circumferential and axial directions to orient the material in the direction of stretching and enhance its mechanical properties.

International Patent Application No. WO 90/02644 describes one process for the manufacture of thermoplastics tubes for example for unplasticised polyvinyl chloride (uPVC) which have a degree of orientation in the circumferential direction that improves properties such as resistance to hoop stresses, and renders the tubes particularly suitable for transmission of water under pressure. The process described in that patent application comprises:

- (i) extruding a tube of plastics material;
- (ii) temperature conditioning the extruded tube to bring it to a temperature suitable for expansion;
- (iii) diametrically expanding the tube by application of an internal pressure to the tube that is limited at its downstream end by a plug that is inflatable or otherwise expandable to maintain pressure within the expansion zone; and
- (iv) cooling the expanded tube to set the tube in its diametrically expanded configuration.

-2-

To pull the tube through this process line a first haul-off tractor is provided before the temperature conditioning zone and another haul-off tractor is provided downstream of the expansion and cooling  
5 zones. Axial draw may be introduced into the product by running the downstream tractor at a higher haul-off speed than the first.

Other processes have been proposed in which the  
10 diametrical expansion is achieved by drawing the tube over a solid mandrel. The present invention is applicable also to such processes.

#### 15 SUMMARY OF THE INVENTION

In a first form, the invention provides a continuous process for producing oriented plastic tube comprising the steps of extrusion, temperature conditioning, diametrical expansion and cooling, characterised in  
20 the step of inducing axial draw of the tube between first and second haul-off means located before said expansion step.

A second form of the invention provides a process line  
25 for continuous production of oriented plastic tube, comprising an extruder for extruding a tube, temperature conditioning means for bringing the tube to a temperature suitable for expansion, expansion means for causing diametrical expansion of the  
30 extruded tube and cooling means for setting the tube in its diametrically expanded configuration, characterised in that first and second haul-off means are located upstream of the expansion means for inducing axial draw of the tube prior to said  
35 diametrical expansion.

The term "haul-off means" as used herein is to be

-3-

understood as referring to means which grip the tube and regulates the axial speed of the tube.

Preferably, the axial draw is induced prior to at  
5 least the completion of the temperature conditioning  
step. In one preferred form, the axial draw is  
induced concurrently with at least part of the  
temperature conditioning step. This may be achieved  
by locating said first haul-off means upstream  
10 (relative to the direction of tube travel) of a  
temperature conditioning zone and locating said second  
haul-off means between the temperature conditioning  
and expansion zones.

#### 15 BRIEF DESCRIPTION OF THE DRAWINGS

Further preferred embodiments shall now be described  
with reference to the accompanying drawings, in which:

20 Figure 1 is a schematic view of the tube manufacture  
and expansion process; and  
Figure 2 is a schematic view showing an alternative  
embodiment.

#### 25 DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to figure 1, the plastic tube 10 is produced  
by extruder 12 and is set to correct diameter by a  
sizing device, such as a sizing sleeve 13, within a  
30 primary cooling spray tank 14. The tube 10 is hauled  
from the extruder by a first haul-off tractor 16.

The tube 10 then proceeds to a temperature  
conditioning zone 18, in which the tube is contacted  
35 with a heat transfer medium such as water to attain a  
specific temperature profile across the tube wall, at  
which the subsequent diametral expansion of the tube

-4-

- causes orientation of the polymer molecules principally in the circumferential direction. The orientation results in enhanced physical properties especially increased resistance to hoop stresses. The
- 5 tube then enters an expansion zone 20 between a pair of plugs 24 and 26 held inside the tube by a service tube 22 connected back through the extruder head to a thrust restraint (not shown).
- 10 The first plug 24 - the upstream plug relative to the direction of travel of the tube 10 - is sized to fit tightly within the unexpanded tube 10. A series of control wheels 25 surrounding the tube circumference push the tube tightly on to the plug 24 so that there
- 15 is sufficient seal to maintain pressure in the expansion zone.

- In the illustrated embodiment, the control wheels 25 are controlled so that dictate the velocity at which
- 20 the tube is fed into the expansion zone. This velocity is higher than that of the first haul-off tractor 16 so that a controlled degree of axial draw of the tube is induced before and/or within the temperature conditioning zone. In alternative
- 25 embodiments, the control wheels 25 can be free running and a separate haul-off means, for example similar to haul-off tractor 16, can be added at the downstream end of the temperature conditioning zone, or a haul-off 36 can replace the wheels 25 at the upstream
- 30 end of the expansion zone where the tube is internally supported by the upstream plug (see Fig. 2).

- Achieving controlled axial draw in the tube wall prior to the expansion zone provides several benefits.
- 35 Firstly, the thinning of the tube wall which occurs due to the axial draw makes the temperature conditioning more efficient so that greater

-5-

temperature uniformity around the tube wall can be achieved before expansion and/or a shorter temperature conditioning zone can be employed.

- 5 The thinning of the tube wall prior to expansion reduces the pressures and axial thrusts required for the diametral expansion, increasing the stability and controlability of the process. Furthermore, the material is delivered to the expansion zone at a set  
10 rate by the second haul-off means, further increasing stability and control.

It will be appreciated that the above advantages apply also to solid mandrel or other diametral expansion  
15 means and the present invention applies also to such processes. Also, the axial draw may be used to orient fibres or other particles (such as elongated fillers) in the tube wall, either in addition or as an alternative to producing axial molecular orientation  
20 of the polymer material.

The downstream plug 26 is inflatable so that its diameter can be changed from the unexpanded state to the expanded state in order to start the process. The  
25 plug 26 is inflated sufficiently to maintain pressure in the expansion zone while allowing some of the expansion fluid to flow past the plug and lubricate the plug within the moving tube. The service tube 22 has a pair of concentric tubes, one of which continues  
30 forward to carry inflation fluid, for example air, to the downstream plug 26 and the other supplying expansion fluid, preferably hot water, to the upstream plug, which then enters the expansion zone via outlets 27.

35 Between the two plugs the plastic tube 10 undergoes expansion in the radial direction due to the internal

-6-

pressure, without external restraint. Towards the downstream end of the expansion zone, there is provided a sizing sleeve 28 or other sizing device and a cooling spray tank 30 for setting the final diameter of the expanded tube 32. This is followed by a final haul-off tractor 34, which may be set at a higher speed than the second haul-off means 25 if it is desired to achieve additional axial orientation of the tube in the expansion zone, and cutting equipment (not shown). In practice some axial orientation of the tube will usually be generated in the expansion zone due to the axial force exerted on the expanded tube 32 by the final tractor 34. The axial force is required in order to counteract the axial force exerted on the tube in the opposite direction by the pressure of expansion fluid in the expansion zone 20.

The average axial draw of the tube over the whole process line is fixed by ratios of the first and final haul-off tractors. Axial draw may be introduced both in the expansion zone itself and in the pre-expansion zone between the first haul-off 16 and the driven wheels 25. Essentially no axial draw is introduced after the expansion zone as the tube has been cooled. Thus, at any time the sum of the axial draw being introduced in the expansion and pre-expansion zones will be equal to the haul-off ratios between the first and final tractors and therefore constant.

By means of the present invention, it is possible to achieve direct control over how much axial draw occurs in each zone. The inventors have found that this is important both to product consistency and the operation of the process itself.

While particular embodiments of this invention have been described, it will be evident to those skilled in

-7-

the art that the present invention may be embodied in other specific forms without departing from the essential characteristics thereof. The present embodiments and examples are therefore to be  
5 considered in all respects as illustrative and not restrictive, the scope of the invention being indicated by the appended claims rather than the foregoing description, and all changes which come within the meaning and range of equivalency of the  
10 claims are therefore intended to be embraced therein.

CLAIMS

1. A continuous process for producing oriented plastic tube comprising the steps of extrusion,  
5 temperature conditioning, diametrical expansion and cooling, characterised in the step of inducing axial draw of the tube between first and second haul-off means located upstream of said expansion step.
- 10 2. A process according to claim 1 wherein the axial draw is induced prior to at least the completion of the temperature conditioning step.
3. A process according to claim 2 wherein the axial  
15 draw is induced concurrently with at least part of the temperature conditioning step.
4. A process according to claim 3 wherein said temperature conditioning step occurs within a  
20 temperature conditioning zone, said first haul-off means is located upstream of the temperature conditioning zone and second haul-off means is located between the temperature conditioning zone and an expansion zone.
- 25 5. A process according to claim 4 wherein the tube is internally supported in the region of said second haul-off means.
- 30 6. A process according to claim 1 further comprising inducing additional axial draw between said second haul-off means and further haul-off means located downstream of said expansion and cooling steps.
7. A process according to claim 1 wherein said

-9-

expansion is induced by internal fluid pressure retained between upstream and downstream plugs located within the tube.

5 8. A process according to claim 7 wherein said downstream plug is capable of diametrical expansion.

9. A process according to claim 7 wherein the downstream plug provides internal support to a part of  
10 the tube contacted by said second haul-off means.

10. A process line for continuous production of oriented plastic tube, comprising an extruder for extruding a tube, temperature conditioning means for  
15 bringing the tube to a temperature suitable for expansion, expansion means for causing diametrical expansion of the extruded tube and cooling means for setting the tube in its diametrically expanded configuration, characterised in that first and second  
20 haul-off means located upstream of the diametrical expansion means induce axial draw of the tube prior to said diametrical expansion.

11. A process line according to claim 10 further  
25 comprising further haul-off means located downstream of said expansion and cooling means for inducing additional axial draw to the tube.

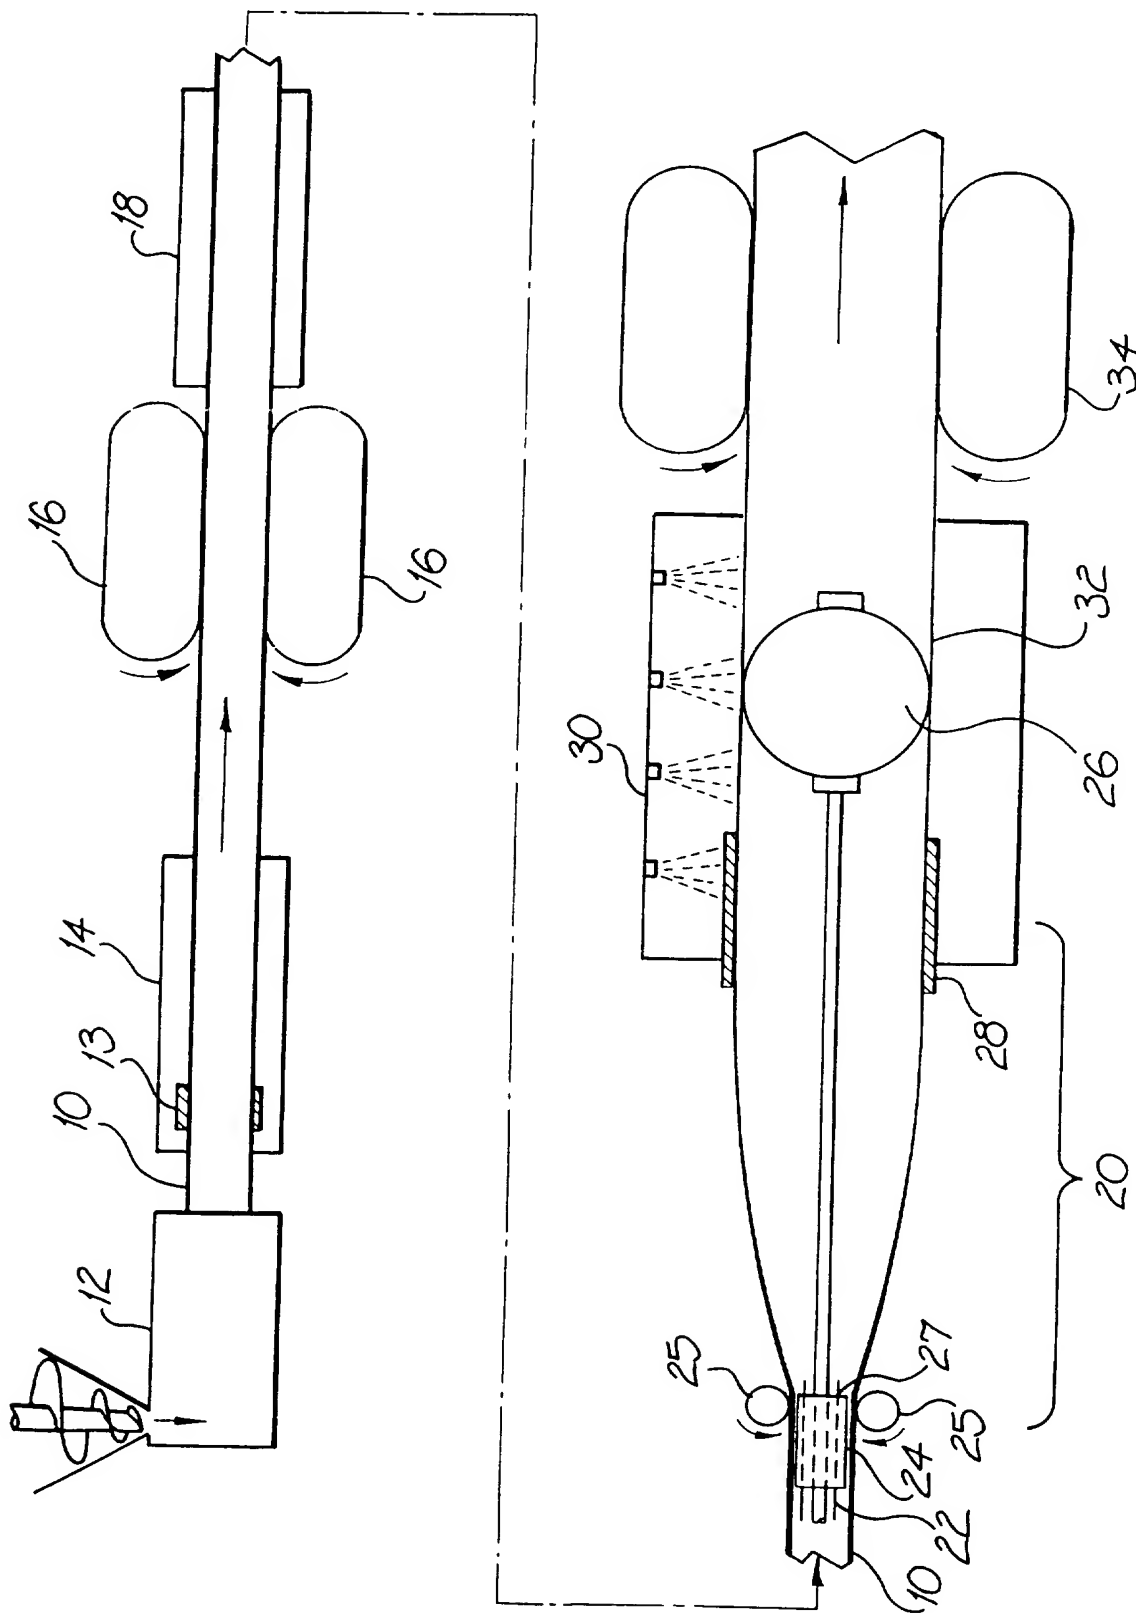


FIG. 1

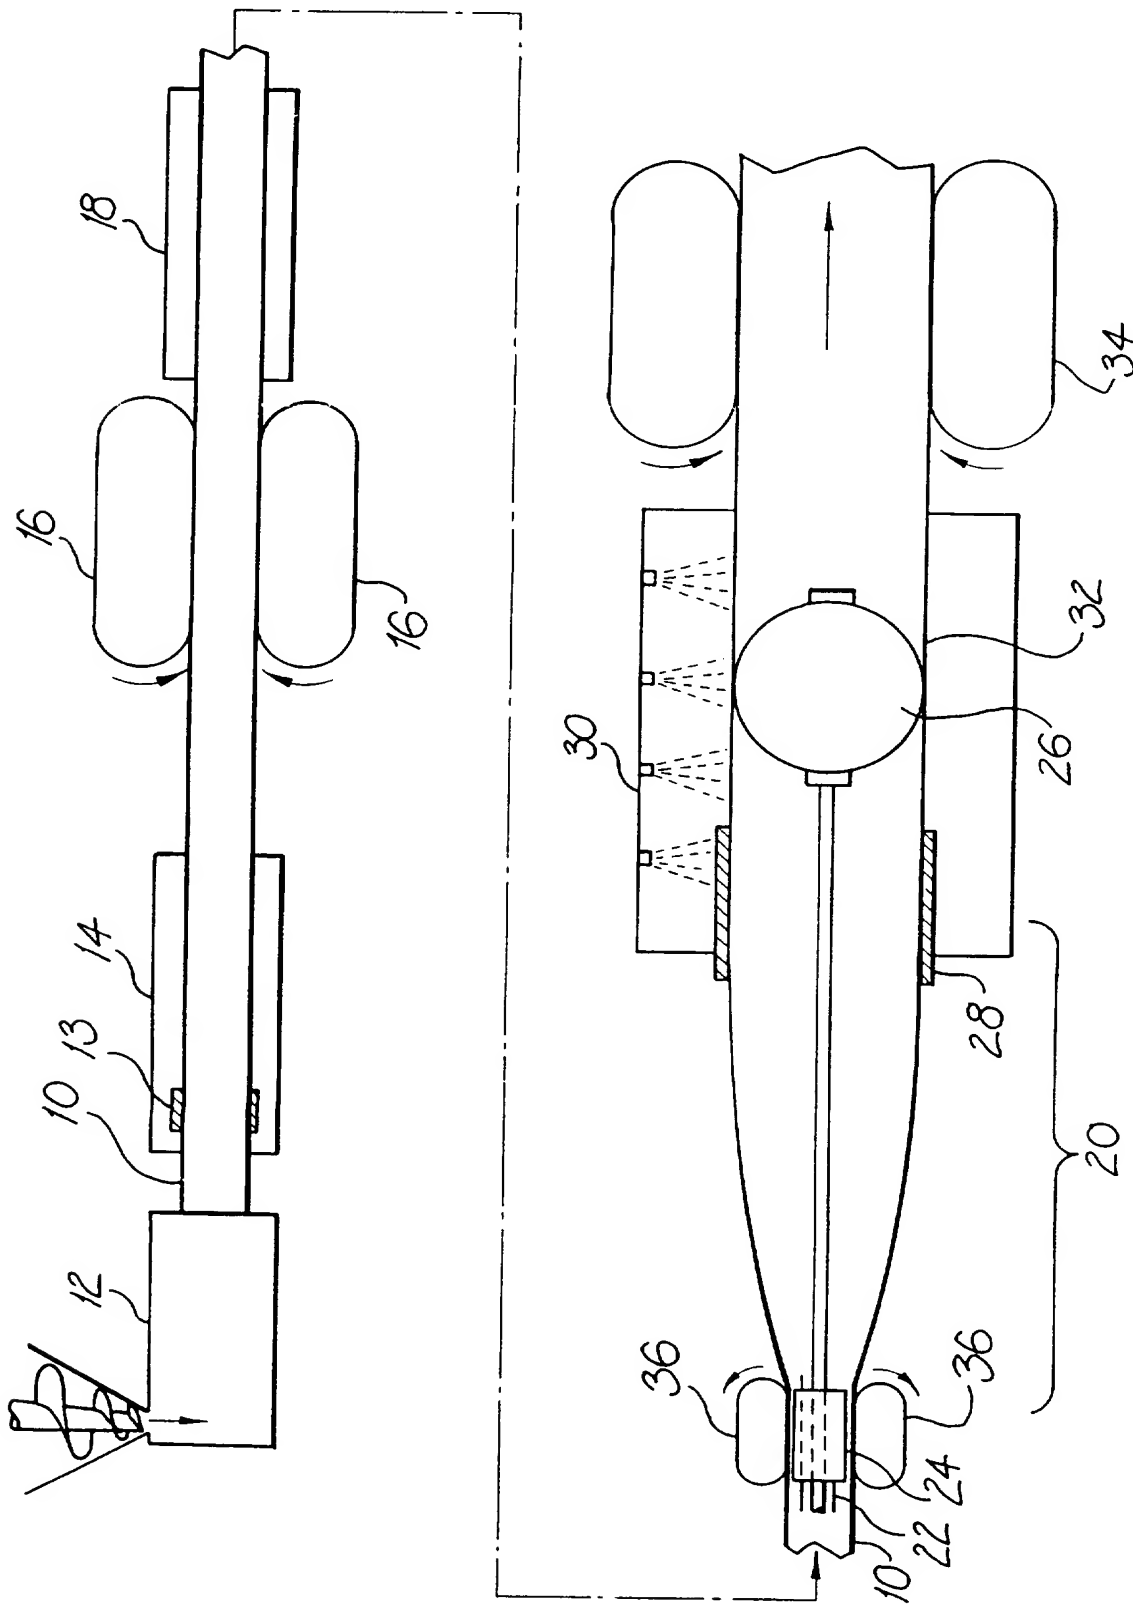


FIG. 2

# INTERNATIONAL SEARCH REPORT

International Application No.  
PCT/AU 96/00575

## A. CLASSIFICATION OF SUBJECT MATTER

Int Cl<sup>6</sup>: B29C 55/26, 47/88 // B29L 23:00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC (6): B29C 55/26, 47/88

IPC (3): B29C 17/02, B29F 3/08

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
AU: IPC as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	Patent Abstracts of Japan, M-44, page 31, JP 55-121016 A, (YOSHINO KKK) 17 September 1980.	
A	Patent Abstracts of Japan, M-1577, page 14, JP 5-329926A, (CCI KK) 14 December 1993.	
A	WO, 90/02644 A1, (VINIDEX TUBEMAKERS) 22 March 1990	

☒ Further documents are listed in the continuation of Box C

☒ See patent family annex

<p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>		<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p>
--	--	---

Date of the actual completion of the international search  
1 October 1996

Date of mailing of the international search report

30 OCT 1996

Name and mailing address of the ISA/AU  
AUSTRALIAN INDUSTRIAL PROPERTY ORGANISATION  
PO BOX 200  
WODEN ACT 2606  
AUSTRALIA Facsimile No.: (06) 285 3929

Authorized officer

David Lee

Telephone No.: (06) 283 2107

**INTERNATIONAL SEARCH REPORT**

International Application No.

**PCT/AU 96/00575**

<b>C (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
<b>Category*</b>	<b>Citation of document, with indication, where appropriate, of the relevant passages</b>	<b>Relevant to claim No.</b>
A	DE, 3903078 A1, (BARMAG AG) 17 August 1989	
A	US, 5322664 A, (BLACKWELDER) 21 June 1994	
A	EP, 468417 A2 (PHILLIPS PETROLEUM) 29 January 1992	
A, P	WO, 95/25626 A1, (WAVIN BV) 28 September 1995	

### Information on patent family members

**PCT/AU 96/00575**

Patent Document Cited in Search Report		Patent Family Member	
JP	55-121016A	NONE	
JP	05-329926A	NONE	
WO	9002644	AU	43282/89
DE	3903078	NONE	
US	5322664	NONE	
EP	468417	JP	4226736
		US	5151235
WO	9525626	AU	19620/95
		NL	9400451

END OF ANNEX